



NAVY ENCLOSURE 100-CA-276

Features

Physical - can all be customized*

Dimensions:	72" H x 24" W x 30" D
Weight:	210 lbs
U's available:	36U
Shock & Vibration:	Externally Isolated
Material:	Aluminum
Payload:	Up to 800 lbs

Installation - can all be customized*


Vessel Interface:	Base and rear mounted
Equipment:	19" EIA hole pattern
I/O:	Rear, tailored to program requirements
Hatch entry/narrow passageway:	Splits for narrow passageway and 30" diameter hatch

Configuration - can all be customized*

Equipment mounting:	Dual EIA rail, front and back
Shock isolation:	Seamount Elastomeric
Back panels:	Multi-section
Grounding:	Bus bar and ground stud

Options Installed - can all be customized*

Power distribution:	10 outlet, 20A power strip 9 outlet, 15A power strip
UPS:	2 KVA UPS
Air cooling:	600 CFM fan tray
Cable management:	Pivoted cable retractors

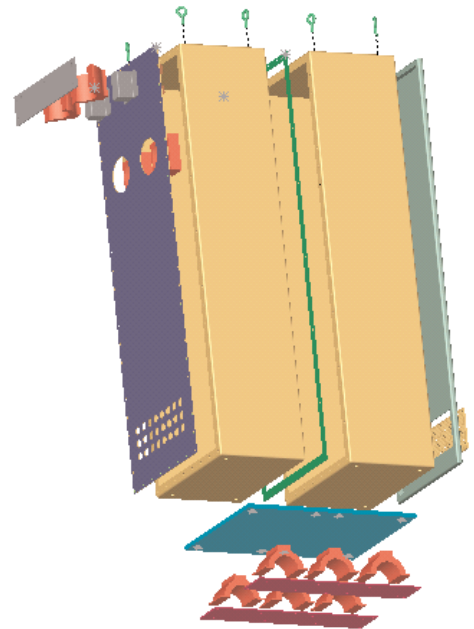

Environmental Characteristics

Shock:	10 G MIL-S-901D Grade A
Vibration:	MIL-STD-167-1

901D Rackable Options

Cooling	PDU / FMU	UPS	PCU
VME/cPCI chassis	Drawers or Slides	FPD [LCD]	FPD [Plasma]
Keyboard / Display / KVM	Ethernet Media Converter / Switch	Extended Temperature Range	

All Features, Environmental Characteristics and Options can be customized to your program requirements*