



AIRBORNE ENCLOSURE 300-CA-216

Features

Physical

Dimensions:	72" H x 28" W x 30" D
Weight:	200 lbs.
U's available:	32U
Shock & Vibration:	Externally Isolated
Material:	Aluminum construction
Payload:	Up to 500 lbs.

Installation


Interface:	Base mounted
Equipment:	19" EIA hole pattern
I/O:	From Rear
Construction:	Disassembly possible

Configuration

Removable side panels:	Interchangeable
Access to equipment:	Front side and rear
I/O:	Removable top plate or rear panel
Grounding:	Bus bar and ground stud
Back panels:	Multi-section
Air filter:	Front door

Options Installed - can all be customized*

Air-cooling:	Inlet fan tray, 1000 CFM 2 x 600 CFM fan tray
Slide mounting:	Universal side rail

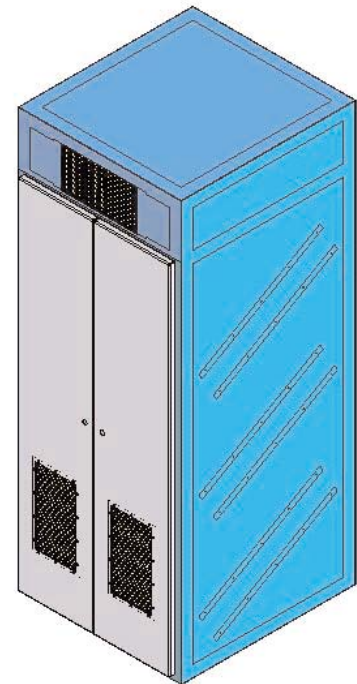

Environmental Characteristics

Shock:	FAR Part 25 compliant
Vibration:	MIL-STD-810
Temperature:	MIL-STD-810

901D Rackable Options

- Cooling
- PDU / FMU
- UPS
- PCU
- VME/cPCI chassis
- Drawers or Slides
- FPD [LCD]
- FPD [Plasma]
- Keyboard / Display / KVM
- Ethernet Media Converter / Switch
- Extended Temperature Range

All Features, Environmental Characteristics and Options can be customized to your program requirements*