



# NAVY ENCLOSURE 300-CS-277

## Features

### Physical - can all be customized\*


Dimensions:	88" H x 132 3/8" W x 38 3/4" D
Weight:	4000 lbs.
U's available:	4 X 38U
Shock & Vibration:	Internally isolated, patent pending
Material:	Steel tube construction
Payload:	Up to 4 X 800lbs

### Installation - can all be customized\*

Vessel Interface:	Base mounted
Equipment:	19" EIA hole pattern
I/O:	Per program requirements

### Configuration - can all be customized\*

Removable side panels:	Interchangeable
Access to equipment:	Front, rear and sides
Extended slides (lockout):	250lbs per tray
Door opening:	Left or right swing, hinge out
Lockout, two positions:	95° and 120°

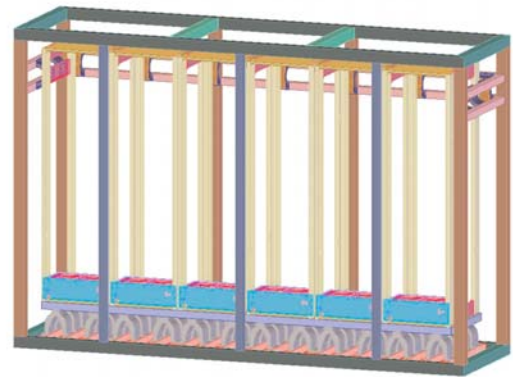

### Options Installed - can all be customized\*

Air cooling:	Water to air heat exchanger
Drawers:	1U slide mounted with shock pins
Cable management:	Pivoted cable retractors

## Environmental Characteristics

Shock :	MIL-S-901D Grade A, Heavy weight
Vibration :	MIL-STD-167-1
Sand/Dust, Salt/Fog, Spill/Rain:	MIL-STD-810E

## 901D Rackable Options

Cooling	PDU / FMU	UPS	PCU
VME/cPCI chassis	Drawers or Slides	FPD [ LCD ]	FPD [ Plasma ]
Keyboard / Display / KVM	Ethernet Media Converter / Switch	Extended Temperature Range	

**All Features, Environmental Characteristics and Options can be customized to your program requirements \***