



Shelter Rack SH-100 Hotel

Features

Physical - can all be customized*

Standard

Dimensions (with stabilizers):	72" H x 32" W x 44"/132" D
Weight:	760 lbs. (4 x 180 lbs)
U's available:	72U to 216U
Shock & Vibration:	Externally isolated
Material:	Aluminum
Payload:	1200 to 4800 lbs

Installation - can all be customized*


Interface:	Base and rear mounted
------------	-----------------------

Configuration - can all be customized*

Equipment mounting:	EIA rails front and back with 36Us usable space
Shock isolation:	Seamount Elastomeric
Door:	Front door lockable - optional
Removalble Side panels:	Optional

Options Installed - can all be customized*

Cooling:	2.5 KW air to water heat exchanger
----------	------------------------------------

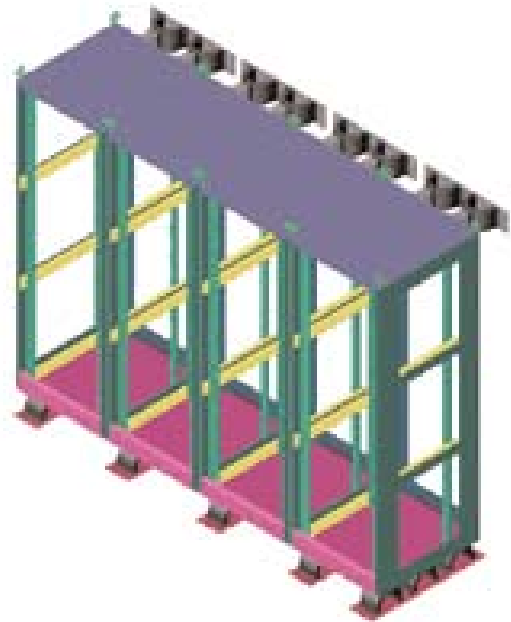

Environmental Characteristics

Shock:	MIL-STD-810E
Vibration:	MIL-STD-810E Munson vibration road test .7 G
EMI/RFI:	MIL-STD-461D
Sand/Dust, Salt/Fog, Spill/Rain:	MIL-STD-810E
Airborne Noise:	MIL-STD-740
Drip proof:	MIL-STD-108 up to 45°

901D Rackable Options

Cooling	PDU / FMU	UPS	PCU
VME/cPCI chassis	Drawers or Slides	FPD [LCD]	FPD [Plasma]
Keyboard / Display / KVM	Ethernet Media Converter / Switch	Extended Temperature Range	

All Features, Environmental Characteristics and Options can be customized to your program requirements*