



Shelter Rack SH-100 NRA

Features

Physical - can all be customized*

Dimensions:	72" H x 30" W x 29" D
Weight:	250 lbs.
U's available:	34U
Shock & Vibration:	Externally isolated
Material:	Aluminum
Payload:	200 to 400 lbs

Installation - can all be customized*


Interface:	Base and Rear mounted
------------	-----------------------

Configuration - can all be customized*

Removable side panels:	Optional
Access to equipment:	Front rear and side
Rotating Gate:	Opens 90 degrees
Door opening:	Left or right swing, hinge out
Lockout:	165 degrees
Equipment Mounting:	At all EIA hole patterns, front and back

Installed Equipment - can all be customized*

Air-cooling:	2U fan tray 3U air-water heat exchangers
--------------	---

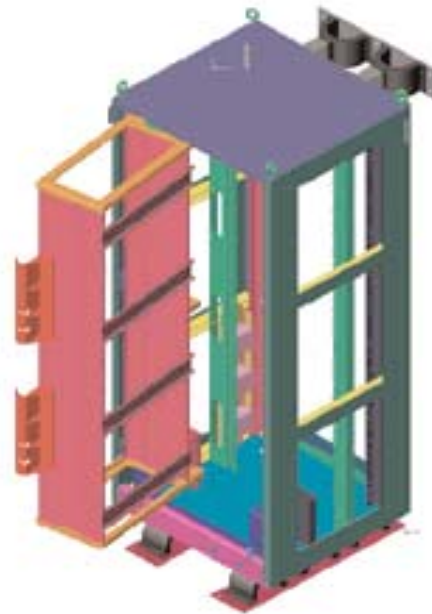

Environmental Characteristics

Shock:	MIL-STD-810E
Vibration:	MIL-STD-810E Munson vibration road test
EMI/RFI:	MIL-STD-461D
Sand/Dust, Salt/Fog, Spill/Rain:	MIL-STD-810E
Airborne Noise:	MIL-STD-740
Drip proof:	MIL-STD-108 up to 45°

901D Rackable Options

Cooling	PDU / FMU	UPS	PCU
VME/cPCI chassis	Drawers or Slides	FPD [LCD]	FPD [Plasma]
Keyboard / Display / KVM	Ethernet Media Converter / Switch	Extended Temperature Range	

All Features, Environmental Characteristics and Options can be customized to your program requirements*