



NAVY CONSOLE CON-CA-292

Features

Physical

Dimensions: 65" H x 29" W x 18" D (open keyboard)
Weight: 110 lbs.

Display

Module: 2 Color active matrix TFT 20.1"
Resolution: 1600x 1200
Brightness: 220 cd/m2
Contrast ratio: 350:1
Viewing angle: 170°/170°
Display color: 16.7M
Active display area: 408 mm x 306 mm

Controls


On Screen display: Waterproof front panel keyboard
Remote control: 1 RS232 port

Electrical Features

Power input: External 12 Vdc, 115-230 Vac, 50-60 Hz
Power consumption: 60 W

Keyboard

Foldable, 104 keys, back light, pointing device, built in alarm speaker

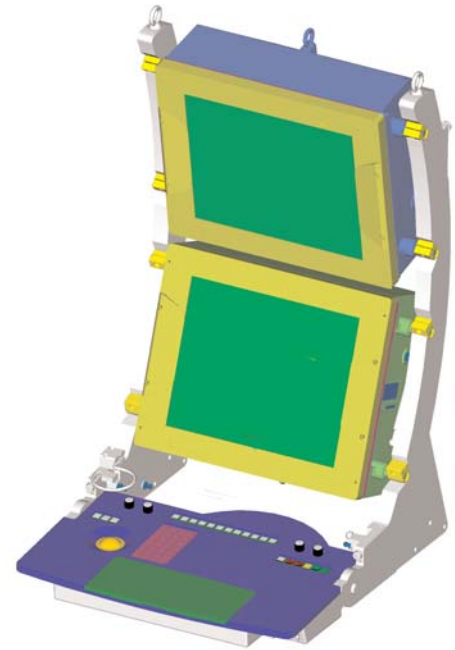

Environmental Characteristics

Shock: MIL S 901D Grade A, heavyweight (shock mounted)
Vibration: MIL STD167
Sand/Dust, Salt/Fog, Spill/Rain: MIL STD 810E
EMI/RFI: MIL STD 461 D/E
Human factors: MIL STD 1492E
Operating temperature: 0°C to +50°C
Storage temperature: -30°C to +70°C
Humidity : up to 95% (non condensing)
Altitude: 0 to 45000 feet

901D Options

Resistive Touch Screen

Track Ball / Joystick

750 VA UPS

VME/cPCI / SBC

Liquid Cooling

Battery Pack

Multiple Screen Sizes

MIL 38999 Connectors

Failure Management Unit (FMU)

PDU

Extended Temperature Range

All Features, Environmental Characteristics and Options can be customized to your program requirements