



901D, LLC
 P.O. Box 615
 360 Route 59
 Tallman, NY 10982-0615


**Enclosures and solutions for
 COTS protection**

Tel: 845-369-1111
 Fax: 845-369-0531
 E-mail: info@901d.com
 Web: www.901d.com

Telecommunication Cabinet TEL-CS Series

Key Points

- Fully Welded Steel Frame Structure (16 Gauge)
- For 19" OR 24" EIA mounting
- Smoked Plexiglass Removable Front Door (Face Mount)
 - Interchangeable To Left or Right Hinging
 - Satin Anodized Aluminum Extrusion Frame
 - Magnetic latching With Keylock
 - Optional Flush Mount Door Available
- Steel Removable Rear Door (Flush Mount)
 - Louvered Perforations Top and Bottom
 - Interchangeable To Left or Right Hinging
- Steel Removable Side Panels (Face Mounted)
 - Louvered Perforations at Bottom
 - Inside Lockdown Mechanism Easy Liftoff Removal For Security
 - Optional Hinged Side Panel Available
- Removable Top Panel
 - Knock-outs For Cable Entry
 - Perforated for 10" Diameter 500 CFM Fan
- Adjustable Leveling Feet
- Open base for cable entry (cover plate available)
 - Base Configured To Accommodate Leveling Feet, Caster Wheels, or Floor Mounting
 - Three (3) 2-inch diameter knockouts in rear of base for cable entry
- Frames configured for convenient and easy ganging of units
- Two pairs of sliding adjustable tapped mounting rails (19", 23" or 24" EIA horizontal spacing, 10-32 threaded holes standard (50 mounting screws included in each cabinet)

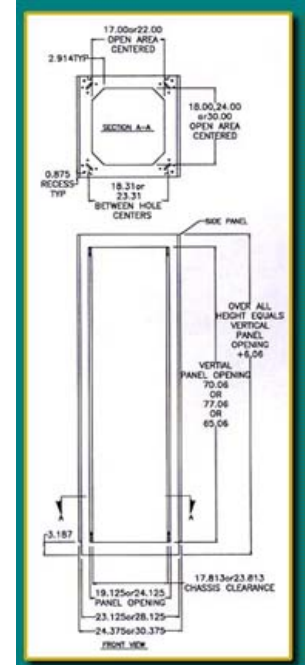

Standard dimensions	Standard colors
H= 84", 77", 72"	Textured white
W= 24" or 28"	Dark blue
D= 24", 30", 36"	Custom (optional)